


## Tools & Adhesives

### The Stripper™ Fletching and Glue Remover

Removes fletching in one easy stroke. Cover keeps reversible curved blade sharp when stored. The Pro-Stripper has all this plus a large handle to cut big jobs down to size.

#1145 Pro-Stripper  
#1141 The-Stripper  
#1146 Blades 3 pk

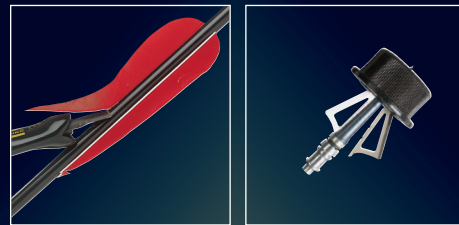

### O-Ring Locks™ Broadhead Alignment Rings

Slips onto the shoulder of screw-in points to help prevent loosening and allow alignment.

#0000 100 pk



### Pro Grip™ Arrow Gripper

This special soft-n-tough tube makes arrow removal fast easy and economical.

#0617 Twin pack



### Quiet Cushion™ Sound Absorbing Foam

Peel-n-stick cushion attaches to bow shelf to eliminate arrow slap and noise. Soft, waterproof and easily contoured for a perfect fit. 3-3/4" x 9"


#0705 2/pk



### Hunt-Bond™ Hot Melt Cement

Hunt-Bond's low melting point, holds inserts and points to aluminum, wood or carbon shafts even in extreme cold when other hot melts become brittle. Over 30 formulations were researched to attain the Hunt-Bond quality.

#1168 8"

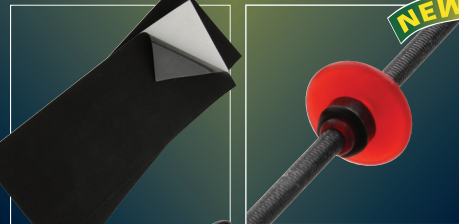

### Arrow Mate™

Considered the best and most advanced nock and vane cement in the archery industry today. Arrow Mate, an all purpose adhesive for household and shop use, works well in damp or freezing conditions.


#1117 NPV Cement 1oz Tube  
#1130 NPV 16 oz Bottle



### Blade Gripper™ Broadhead Tool

Regular tools protect fingers but only the Blade Gripper's patented interference fit grips the blades for positioning and easy assembly.

#0608

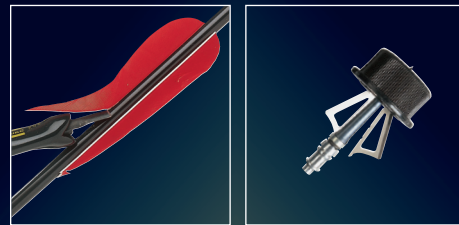

### Point Puller™ Fits ATA Standard Threads

Machined from carbon alloy steel, plated and finished with foam handles. Compact, durable and makes extracting broadheads and points a cinch.

#0610



### Grip Tite™ Arrow Pulling Pad

Flexible super grip material makes arrow removal easier. Attached wrist strap conveniently keeps it ready for use.

#0614



### Kiss-XL Soft Large Slotted Kisser

Kiss-XL New super tough soft plastic. Soft rounded edge. Weight 14 grains, 17mm OD. Slotted for easy installation. Positioning rings included.

#2408 For 16-18 Strand




### Kiss-X Soft Slotted Kisser

Kiss-X New super tough soft plastic. 1/2" (13mm) OD, weight 11 grains. Smooth rounded edge for a comfort. Slotted for easy over string installation. Positioning rings included.

#2403 For 12-14 Strand

#2404 For 16-18 Strand

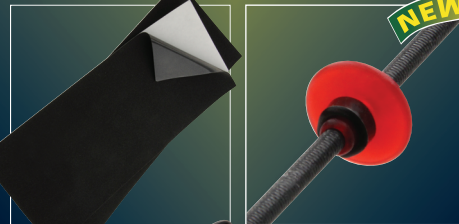

### Tabs Pak-Tab™ / Mono Tab™

Pak-Tab allows you to switch layers to match shooting conditions. The "super slick" outer tab and soft cushion layer will not absorb moisture or scent. Add the felt layer when more cushion is needed. Assemble the layers that meet your needs. Can be used with or without finger spacer and is reversible for right or left hand. Custom brass fasteners make changing layers easy. Looking for simplicity?... the single layer Mono Tab is the way to go. Specify size (S,M or L) and translucent color (N) Pink, (Y)ellow, Brown, (P)urple or (B)lue.


#0900 Pak-Tab  
#0824 Mono Tab



### 3-Under Tabs Three Layer / Mono

Our famous super slick tab made for three-under style shooters. Now with string-walker index marks. One layer of felt between two layers of super slick plastic. Can be assembled for Right or left hand shooter. Specify size. (S,M or L) and translucent color (N) Pink, (Y)ellow, Brown, (P)urple or (B)lue

#0930 Three layered  
#0834 Mono 3-Under


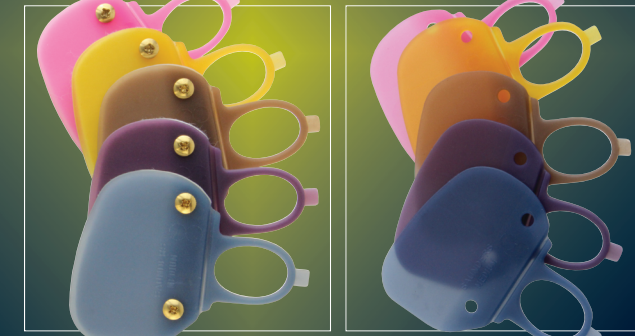


### Ledge-Edge™ Split Finger Tab Accessory

The Ledge-Edge™ roller rides on the inner chin improving accuracy. Vertical and lateral adjustment is fast and easy. Five interchangeable plates provide many choices for ideal roller placement. Fits most professional grade tabs. For more info visit our web site.

Patent No. 9,074,836,B1

#0950 Basic System  
#0951 Repl. Ledge  
Specify S,M,L,XL,XX

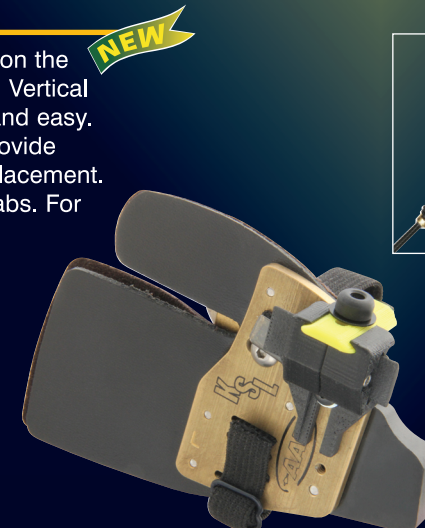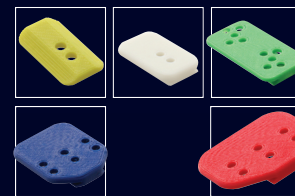

### Finger Guard™ For no glove shooting.

Soft waterproof material makes Finger Guard perfect for bowfishing. Cushioned sleeves slip over bowstring and anchor with Nok Sets® (included) Provides smooth release, consistent nocking point and finger protection. For use on strings up to 16-strand.

#1720

